

# Experiment No. 8

## Configuring 802.1Q Trunk-Based Inter-VLAN Routing

### LEARNING OBJECTIVE:


Upon completion of this lab, you will be able to:

**Part 1: Build the Network and Configure Basic Device Settings**

**Part 2: Configure Switches with VLANs and Trunking**

**Part 3: Configure Trunk-Based Inter-VLAN Routing**

### TOPOLOGY

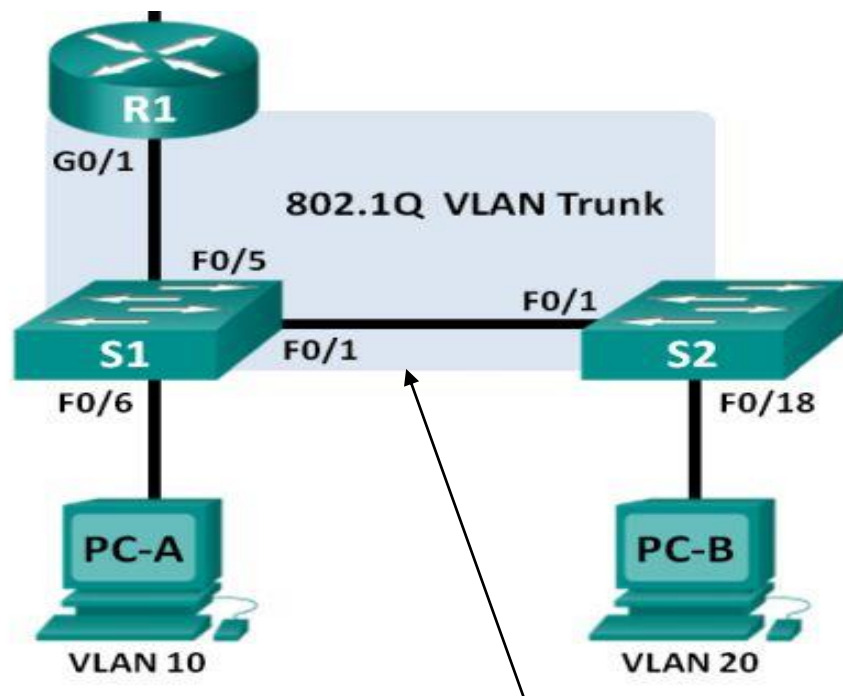

(Use cross over cable for this)

### ADDRESSING TABLE:

Device	Interface	IP Address	Subnet Mask	Default Gateway
R1	G0/1.1	192.168.1.1	255.255.255.0	N/A
	G0/1.10	192.168.10.1	255.255.255.0	N/A
	G0/1.20	192.168.20.1	255.255.255.0	N/A
	Lo0	209.165.200.225	255.255.255.224	N/A
S1	VLAN 1	192.168.1.11	255.255.255.0	192.168.1.1
S2	VLAN 1	192.168.1.12	255.255.255.0	192.168.1.1
PC-A	NIC	192.168.10.3	255.255.255.0	192.168.10.1
PC-B	NIC	192.168.20.3	255.255.255.0	192.168.20.1

Skip it

### SWITCH PORT ASSIGNMENT SPECIFICATIONS:

Ports	Assignment	Network
S1 F0/1	802.1Q Trunk	N/A
S2 F0/1	802.1Q Trunk	N/A
S1 F0/5	802.1Q Trunk	N/A
S1 F0/6	VLAN 10 – Students	192.168.10.0/24
S2 F0/18	VLAN 20 – Faculty	192.168.20.0/24

### Background Scenario:

A second method of providing routing and connectivity for multiple VLANs is through the use of an 802.1Q trunk between one or more switches and a single router interface. This method is also known as router-on-a-stick inter-VLAN routing. In this method, the physical router interface is divided into multiple subinterfaces that provide logical pathways to all VLANs connected.

In this lab, you will configure trunk-based inter-VLAN routing and verify connectivity to hosts on different VLANs as well as with a loopback on the router.

### Part 1: Build the Network and Configure Basic Device Settings

In Part 1, you will set up the network topology and configure basic settings on the PC hosts, switches, and router.

**Step 1: Cable the network as shown in the topology.**

**Step 2: Configure PC hosts.**

**Step 3: Initialize and reload the router and switches as necessary.**

**Step 4: Configure basic settings for each switch.**

- a. Disable DNS lookup.
- b. Configure device names as shown in the topology.
- c. Assign class as the privileged EXEC password.
- d. Assign cisco as the console and vty passwords.
- e. Configure logging synchronous for the console line.
- f. Configure the IP address listed in the Addressing Table for VLAN 1 on both switches.
- g. Configure the default gateway on both switches.
- h. Administratively deactivate all unused ports on the switch.
- i. Copy the running configuration to the startup configuration.

**Step 5: Configure basic settings for the router.**

- a. Disable DNS lookup.
- b. Configure device names as shown in the topology.
- c. Configure the Lo0 IP address as shown in the Address Table. Do not configure subinterfaces at this time as they will be configured in Part 3 (**Skip this step**).
- d. Assign cisco as the console and vty passwords.
- e. Assign class as the privileged EXEC password.
- f. Configure logging synchronous to prevent console messages from interrupting command entry.
- g. Copy the running configuration to the startup configuration.

## **Part 2: Configure Switches with VLANs and Trunking**

In Part 2, you will configure the switches with VLANs and trunking.

Note: The required commands for Part 2 are provided in Appendix A. Test your knowledge by trying to configure S1 and S2 without referring to the appendix.

**Step 1: Configure VLANs on S1.**

- a. On S1, configure the VLANs and names listed in the Switch Port Assignment specifications table. Write the commands you used in the space provided.

---

---

---

---

---

---

---

---

---

b. On S1, configure the interface connected to R1 as a trunk. Also configure the interface connected to S2 as a trunk. Write the commands you used in the space provided.

---

---

---

---

---

c. On S1, assign the access port for PC-A to VLAN 10. Write the commands you used in the space provided.

---

---

---

**Step 2: Configure VLANs on Switch 2.**

- a. On S2, configure the VLANs and names listed in the Switch Port Assignment Specifications table.
- b. On S2, verify that the VLAN names and numbers match those on S1. Write the command you used in the space provided.

S2# show vlan brief

- c. On S2, assign the access port for PC-B to VLAN 20.
- d. On S2, configure the interface connected to S1 as a trunk.

**Part 3: Configure Trunk-Based Inter-VLAN Routing**

In Part 3, you will configure R1 to route to multiple VLANs by creating subinterfaces for each VLAN. This method of inter-VLAN routing is called router-on-a-stick.

**Step 1: Configure a subinterface for VLAN 1.**

a. Create a subinterface on R1 G0/1 for VLAN 1 using 1 as the subinterface ID. Write the command you used in the space provided.

```
R1(config)# interface g0/1.1
```

b. Configure the subinterface to operate on VLAN 1. Write the command you used in the space provided.

```
R1(config-subif)# encapsulation dot1Q 1
```

c. Configure the subinterface with the IP address from the Address Table. Write the command you used in the space provided.

```
R1(config-subif)# ip address 192.168.1.1 255.255.255.0
```

**Step 2: Configure a subinterface for VLAN 10**

a. Create a subinterface on R1 G0/1 for VLAN 10 using 10 as the subinterface ID.

b. Configure the subinterface to operate on VLAN 10.

c. Configure the subinterface with the address from the Address Table.

**Step 3: Configure a subinterface for VLAN 20.**

a. Create a subinterface on R1 G0/1 for VLAN 20 using 20 as the subinterface ID.

b. Configure the subinterface to operate on VLAN 20.

c. Configure the subinterface with the address from the Address Table.

**Step 4: Enable the G0/1 interface.**

Enable the G0/1 interface. Write the commands you used in the space provided.

```
R1(config)# interface g0/1
R1(config-if)# no shutdown
```

**Step 5: Verify connectivity.**

Enter the command to view the routing table on R1. What networks are listed?

```
R1# show ip route
```

From PC-A, is it possible to ping the default gateway for VLAN 10? \_\_\_\_\_ Yes

From PC-A, is it possible to ping PC-B? \_\_\_\_\_ Yes  
From PC-A, is it possible to ping Lo0? \_\_\_\_\_ Yes  
From PC-A, is it possible to ping S2? \_\_\_\_\_ Yes

If the answer is no to any of these questions, troubleshoot the configurations and correct any errors.

### Reflection

What are the advantages of trunk-based or router-on-a-stick inter-VLAN routing?

---

---

---

### Task

**Modify above topology by adding two more PC's.**

**Add PC-0 in Vlan 10 and connect with switch port Fa0/6,**


**Add PC-1 in Vlan 20 and connect with switch port Fa0/11,**

**Add PC-2 in Vlan 10 and connect with switch port Fa0/11,**

**Add PC-2 in Vlan 20 and connect with switch port Fa0/18.**

From PC-0, is it possible to ping the PC-2? \_\_\_\_\_

From PC-2, is it possible to ping PC-3? \_\_\_\_\_

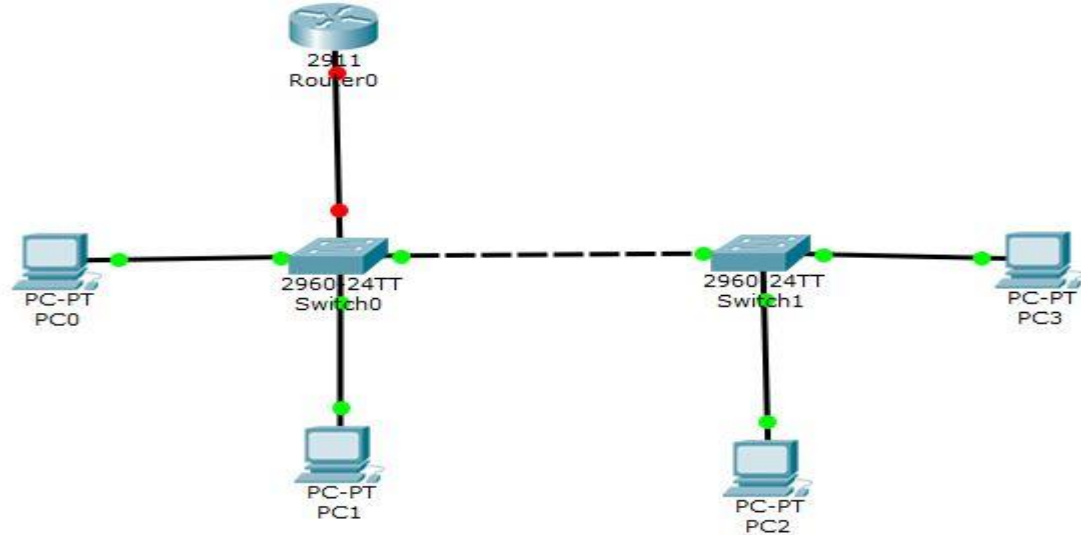

**CONCLUSION & COMMENTS:**

