

## EXPERIMENT NO. 12

### HOOKE'S LAW

**Objectives:** The main objective of this experiment is to show Hooke's Law of spring, calculate the total energy absorbing in the spring.

#### Equipment

Tripod Base

Barrel Base

Support Rod, square,  $l=1000\text{mm}$

Right Angle Clamp

Cursor, 1 pair

Weight Holder f. Slotted Weights

Slotted Weight, 10g, black

Slotted Weight, 10g, silver bronze

Slotted Weight, 50g, black

Slotted Weight, 50g, silver bronze

Helical Spring 3 N/m

Helical Spring 20 N/m

Silk Thread, 200m

Meter Scale demo  $l=1000\text{mm}$

Holding Pin

Square section rubber strip,  $l=10\text{m}$



Figure 4.1 Experimental set up

#### Theory


Measuring the stretching produced by different loads, added to the spring, tests the elasticity of a spring. When a spring is stretched by an applied force, a restoring force is produced. Due to the restoring force, simple harmonic motion is caused in a straight line in which the acceleration and the restoring force are directly proportional to the displacement of the vibrating load from the equilibrium position. The relation between the force  $F$  and displacement  $x$  is  $F = -kx$ . The force is opposite in direction to the displacement. The constant  $k$  is known as the force constant of the spring. This is the force, expressed in Newton, which will produce an elongation of one meter in the spring. The equation of energy of the spring is shown below.

$$dW = Fdx \quad (1)$$

And if we integrate the Eq.1 the equation of the potential energy of the spring is shown below

$$W = \Delta PE = -1/2k(x_1^2 - x_0^2)$$

(2)

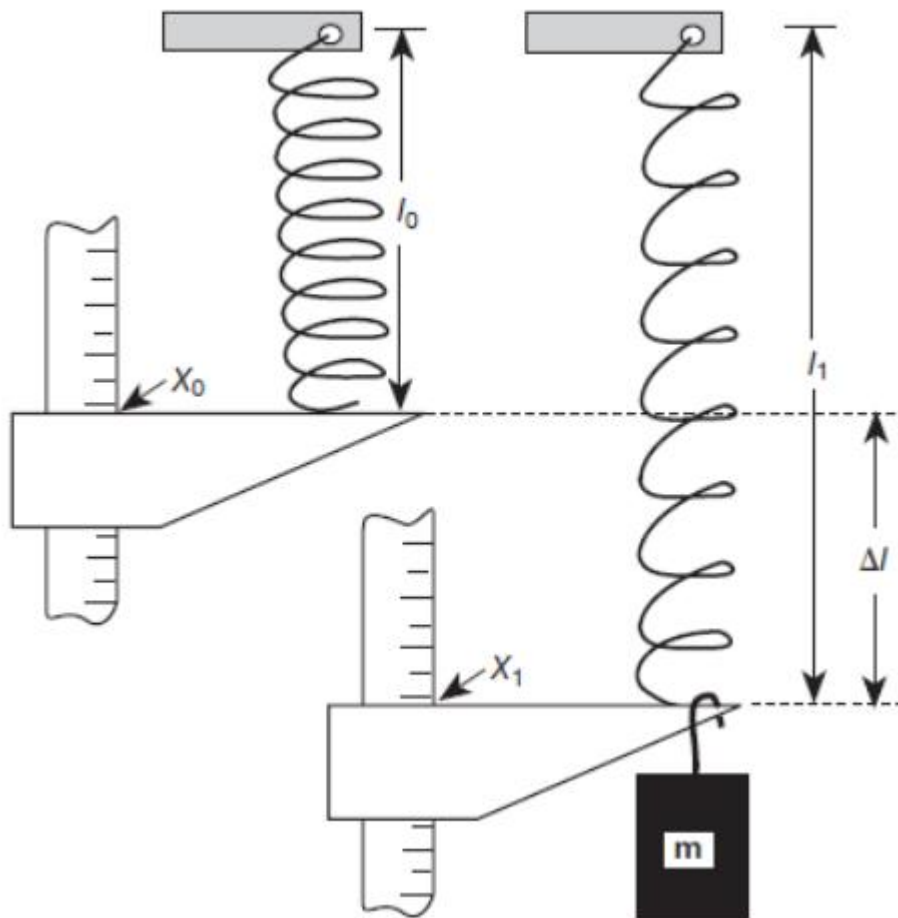

1. Set up the spring as in figure
2. Measure the length of each spring
3. Hang a  $m_1$  on first spring and record the elongation.
4. Repeat the step 3 for different masses. ( $m_2, m_3$ )
5. Repeat the steps 4 and 5 for second spring.
6. Calculate the applied force for different masses and spring.
7. Calculate  $k$  using  $F_i/\Delta l_i$  and  $k_{avg}$  for each spring.

For thin spring:  $k_{avg} = \dots \dots \dots$

For thick spring:  $k_{avg} = \dots \dots \dots$

Spring	Mass(kg)	Length of the spring(m)	Elongation (m)	Force (m * g)	$k = F_i / \Delta L_i$ (kg*g / m)	$k_{av}$
Thin	0,12					
Thin	0,17					
Thin	0,22					
Thick	0,17					
Thick	0,27					
Thick	0,32					

8. Connect the thin and thick springs in series.

9. Measure the extension  $\Delta L = \dots\dots\dots$  caused by a 0.12 kg mass compute the equivalent value of  $k_{eq}$  from  $k_{eq} = F / \Delta L$ .

By means of the formula

$$1/k_{eq} = 1/k_1 + 1/k_2$$

or  $1/k_{eq} = k_1 k_2 / (k_1 + k_2)$ .

10. Connect the first and second springs in parallel.

Measure the extension  $\Delta L = \dots\dots\dots$  caused by a 0.17 kg mass compute the equivalent value of  $k_{eq}$  from  $k_{eq} = F / \Delta L$

By means of the formula  $k_{eq} = k_1 + k_2$

**Results and Discussion:** Discuss the results

.....  
 .....